


Y:\0000\CADD STANDARDS\DETAILS\City Details\Easton MD\DETAILS\PW-4.02.dwg Sep 17, 2014 - 11:27am, (merf)

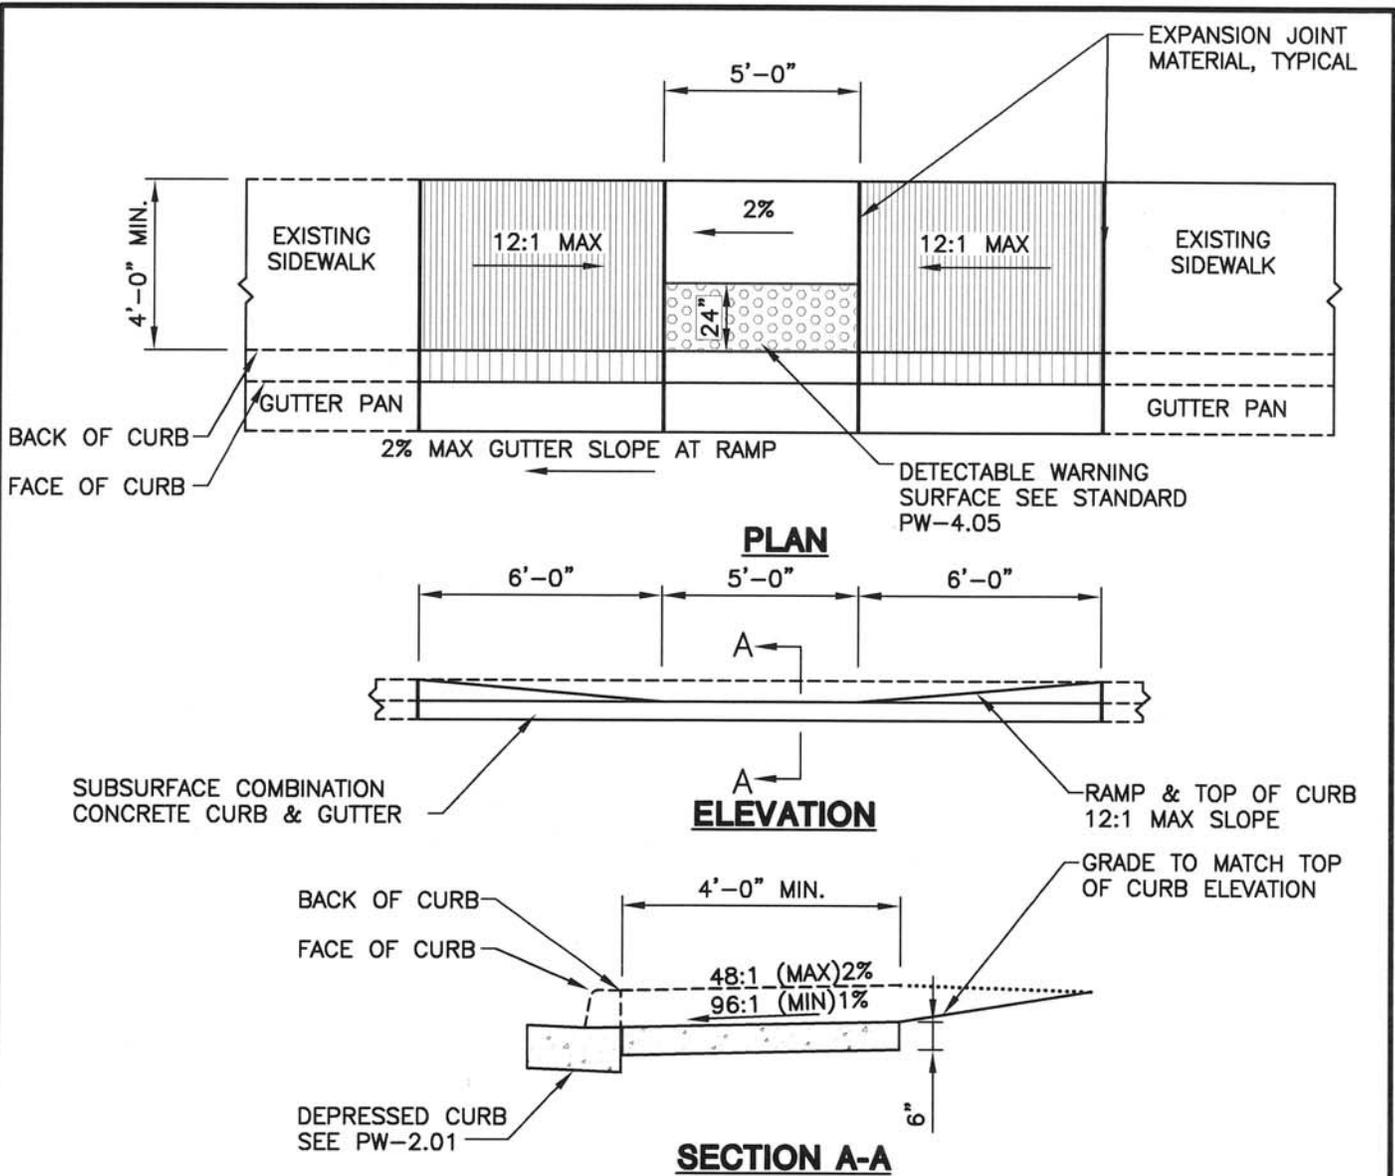

NOTES:

1. SURFACE TEXTURE OF RAMPS SHALL BE COARSE BROOMING OR NON-SKID TYPE SURFACE.
2. NO TRAVERSABLE SLOPE ON THE RAMP OR SIDEWALK SHALL EXCEED 12:1 IN THE DIRECTION OF PEDESTRIAN TRAVEL, OR 48:1 (2%) PERPENDICULAR TO THE DIRECTION OF PEDESTRIAN TRAVEL.
3. TO BE USED WHERE SIDEWALK IS ADJACENT TO THE CURB.
4. HANDICAPPED RAMPS SHALL BE REINFORCED WITH 6x6 W1.4xW1.4 WELDED WIRE MESH.
5. AT NO POINT SHALL THE SLOPE OF THE LANDING BE GREATER THAN 48:1 (2%), INCLUDING DIAGONAL.
6. THERE SHALL BE A LANDING PRIOR TO THE RAMPS. THE LANDING SHALL BE 36" IN LENGTH, MINIMUM.

APPROVAL  TOWN ENGINEER	REVISD FEB 25, 09 JAN 1, 11 SEP 17, 14	TOWN OF EASTON AND EASTON UTILITIES STANDARD DETAILS SIDEWALK RAMPS TYPE "C" PARALLEL FOR RETROFIT	
			9/17/14 DATE
			ISSUED: MAR 26, 2007
			STANDARD NO. PW-4.02